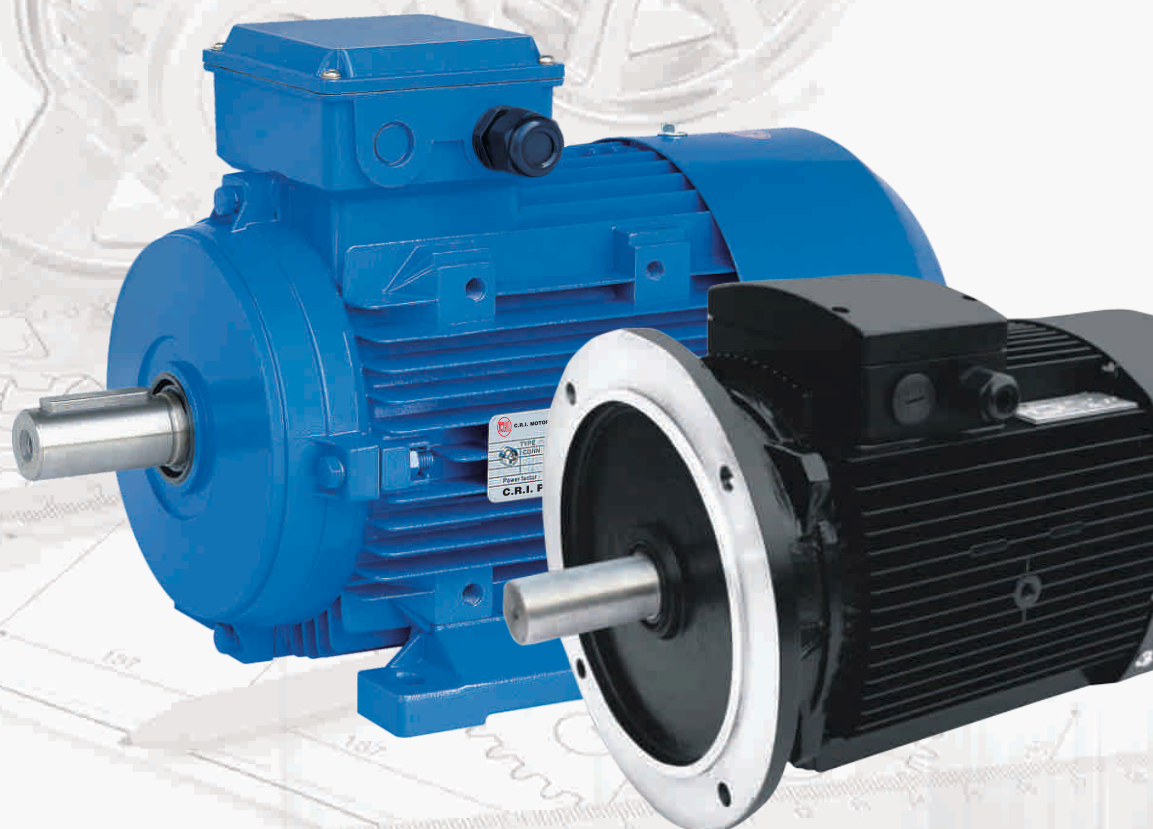


Sheer POWER



A.C. Induction Motors - 50Hz



C.R.I. PUMPS
Pumping trust. Worldwide.

T H E B E G I N N I N G

of C.R.I., way back in 1961, was a resolute attempt to produce a few irrigation equipments using the limited facilities of an in-house foundry. Eventually the founder's dream was coming true as the small production unit he started kept growing rapidly. Now, after more than five eventful decades, it is an enormous, widely reputed organization, which produces more than 2300 varieties of perfectly engineered pumps and motors and sells its products in numerous countries spread across 6 continents.

C . R . I . I S O N E A M O N G

the few pioneers in the world to produce 100% stainless steel submersible pumps. Having achieved a record production capacity of over 2 million pumps per annum, today C.R.I. is rubbing its shoulders with the best brands in the world, with advanced technology and safety standards as its hallmarks.

T H E I N F R A S T R U C T U R E

of C.R.I. is pretty comprehensive with state-of-the-art machineries and high potential in-house R&D recognised by the ministry of science and technology, Govt. of India - all within its own covered area of 300,000 square metres. The production environment is accredited with ISO 9001, ISO 14001 & OHSAS 18001 certifications and the products are CE, UR/UL, IEC, TSE & ISI certified. The R&D team always stays in tune with the changing scenario and seldom fails in coming up with outstanding solutions every time.

N E E D L E S S T O S A Y ,

behind this legendary growth lies the untiring, innovative, enthusiastic and dedicated team work. and, of course, a flawlessly maintained value system too. The name C.R.I. itself encapsulates the company's ethos: "Commitment, Reliability, Innovation".





C.R.I. PUMPS
Pumping trust. Worldwide.

Vision, Mission and Values

To be the industry leader providing best - in - class fluid management solutions to individual and institutional customers and societies in our chosen markets.

We will achieve this through our dedicated efforts to enhance the welfare of all our stakeholders and by living by our values of **commitment, reliability and innovation.**


CONTENTS

A.C. INDUCTION MOTORS - 50Hz

Model Identification Code	3
Description & Application & MOC	4
Technical Specifications & Exploded View	5
IE 1 Motors	6-7
IE 2 Motors	8
IE 3 Motors	9
Dimensional Details	10
Shaft, Shaft Key Dimensions & Degree of Protection Details	11
Mounting Arrangements & Electrical Parameters	12-15

MODEL IDENTIFICATION CODE

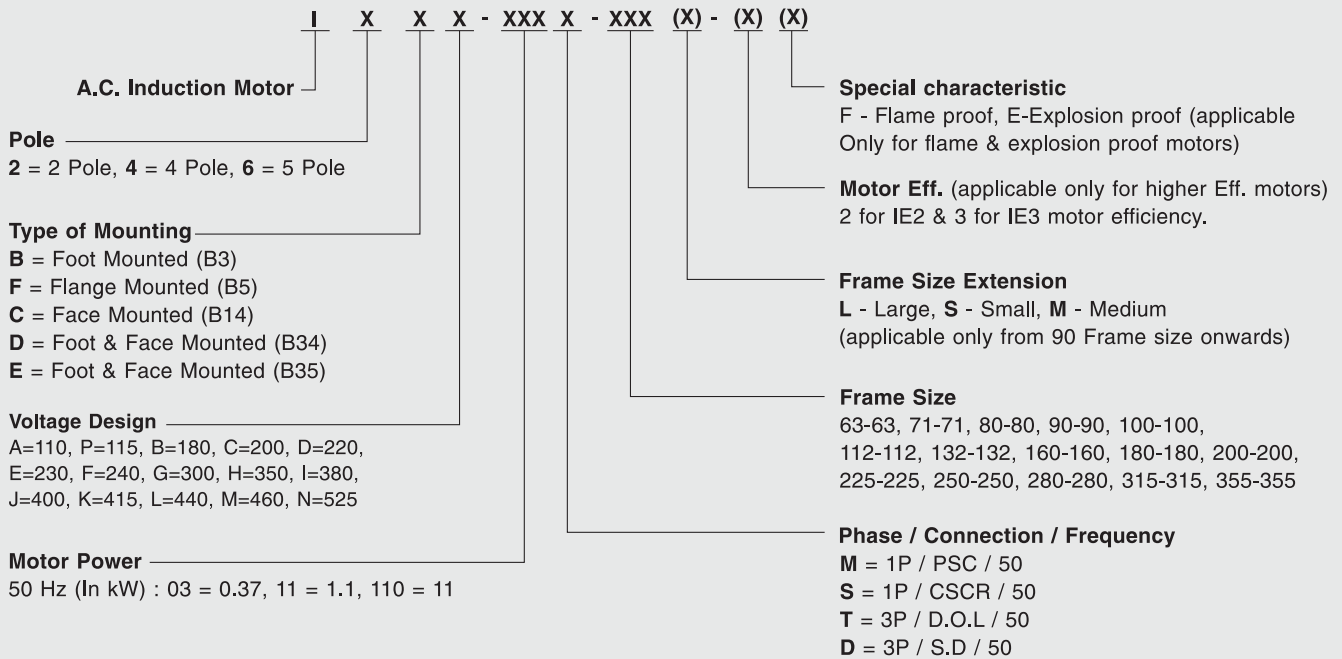A.C. INDUCTION MOTOR - 50Hz



Description :

Foot / Face Mounted Type

Single Phase : I2BE-11M-80, 1.1 kW, 50 Hz, 230 V, 1 Ph, Foot Mounted A.C. Induction Motor.

Three Phase : I2CI-150T-90, 15 kW, 50 Hz, 380 V, 3 Ph, DOL, Face Mounted A.C. Induction Motor.

Flange Mounted Type

Single Phase: I4FE-11M-80-2, 1.1 kW, 50 Hz, 230 V, 1 Ph, IE2, Flange Mounted A.C. Induction Motor.

Note : Flame proof & High Tension motors can be supplied on requirements.

* In view of continuous development, the information / descriptions / specifications / illustrations are subject to change without notice.




C.R.I. offers a comprehensive range of A.C. Induction motors in standard and premium efficiency designs for wide range of applications. These motors are synchronous type with constant speed suitable for continuous duty operations. Stator is made of low watt loss steel laminations to deliver high efficiency. Dynamically balanced rotor and high quality bearings ensure vibration and noise free operations. The varnish impregnated windings are made of high-grade enameled copper wire.

Shaft is made of high quality steel, precision ground of ample size for transmitting the rated horsepower. Construction of motor frames and usage of quality materials result in high performance and low temperature rise, thereby increasing the life cycle of the motor. High-grade cast iron / Die-cast Aluminum components machined with close tolerance and high quality, heavy duty bearings are used to ensure better efficiency and longer life. All single and three phase motors require adequate control systems with necessary protections.

Motors are available with IE-3(Premium Efficiency) IE2(EFF-1), IE1(EFF-2) versions with B3, B14 & B5 mounting dimensions to cater various applications.

Applications : Machine Tools | Blowers and Fans | Air-Conditioners | Compressors | Material Handling Equipments | Cranes and Hoist | Textile Machinery | Cement Plant | Pharmaceutical Machinery | Packaging Machinery | Construction Equipments | Agriculture | Food processing Machinery | Water treatment plants | General Engineering.

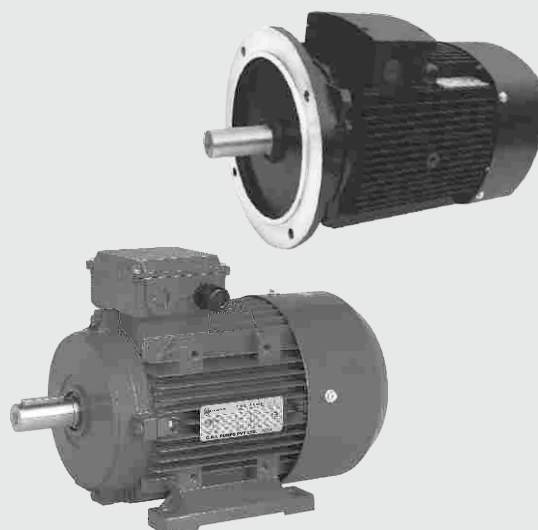

MATERIALS OF CONSTRUCTION

Motor Parts	Frame Size	Material
Stator frame	56 - 132	Aluminum alloy
	160 - 355	Cast iron
Endshield	56 - 90	Aluminum alloy
	100 - 355	Cast iron
Flanged endshield	56 - 132	Aluminum alloy
	160 - 355	Cast iron
Fan cover	71 - 355	Mild steel
Fan	71 - 355	Industrial nylon grade
Terminal box (1Ph)	71 - 90	Industrial nylon grade
Terminal box (3Ph)	71 - 132	Aluminum alloy
	160 - 355	Mild steel / Cast iron

PERMISSIBLE NO. OF COLD STARTS PER HOUR


The permissible number of starts per hour can be taken as given in the table below, provided the following conditions are met : Additional moment of inertia moment of inertia of the rotor; load torque rising with the square of the speed up to nominal torque ; starts at even intervals.

Frame size	Starts / Hours	Max. Starts / Day
56 - 71	100	250
80 - 100	60	140
112 - 132	30	60
160 - 180	15	30
200 - 225	8	15
250 - 355	4	8

TECHNICAL SPECIFICATIONS

Class of Motor	IE1	IE2	IE3
Type	Squirrel Cage Induction Motor	Squirrel Cage Induction Motor	Squirrel Cage Induction Motor
Power Range	0.37 - 2.2 kW, 1Ph, 230V, 50Hz 0.37 - 315 kW, 3Ph, 380-415V, 50Hz	0.75 - 315 kW 3Ph, 380-415V, 50Hz	0.75 - 315 kW 3Ph, 380-415V, 50Hz
Pole	2 Pole / 4 Pole (6 Pole on request)	2 Pole / 4 Pole (6 Pole on request)	2 Pole / 4 Pole (6 Pole on request)
Speed	2900 / 1450 rpm	2900 / 1450 rpm	2900 / 1450 rpm
Insulation Class	"F"	"F"	"F"
Protection	IP 44 / IP 55	IP 55	IP 55
Duty	Continuous (S1)	Continuous (S1)	Continuous (S1)
Ambient Temp.	40°C	40°C	40°C
Enclosure	TEFC	TEFC	TEFC
Mounting	Foot / Face / Flange	Foot / Face / Flange	Foot / Face / Flange
Direction of Rotation	Bi-Directional	Bi-Directional	Bi-Directional

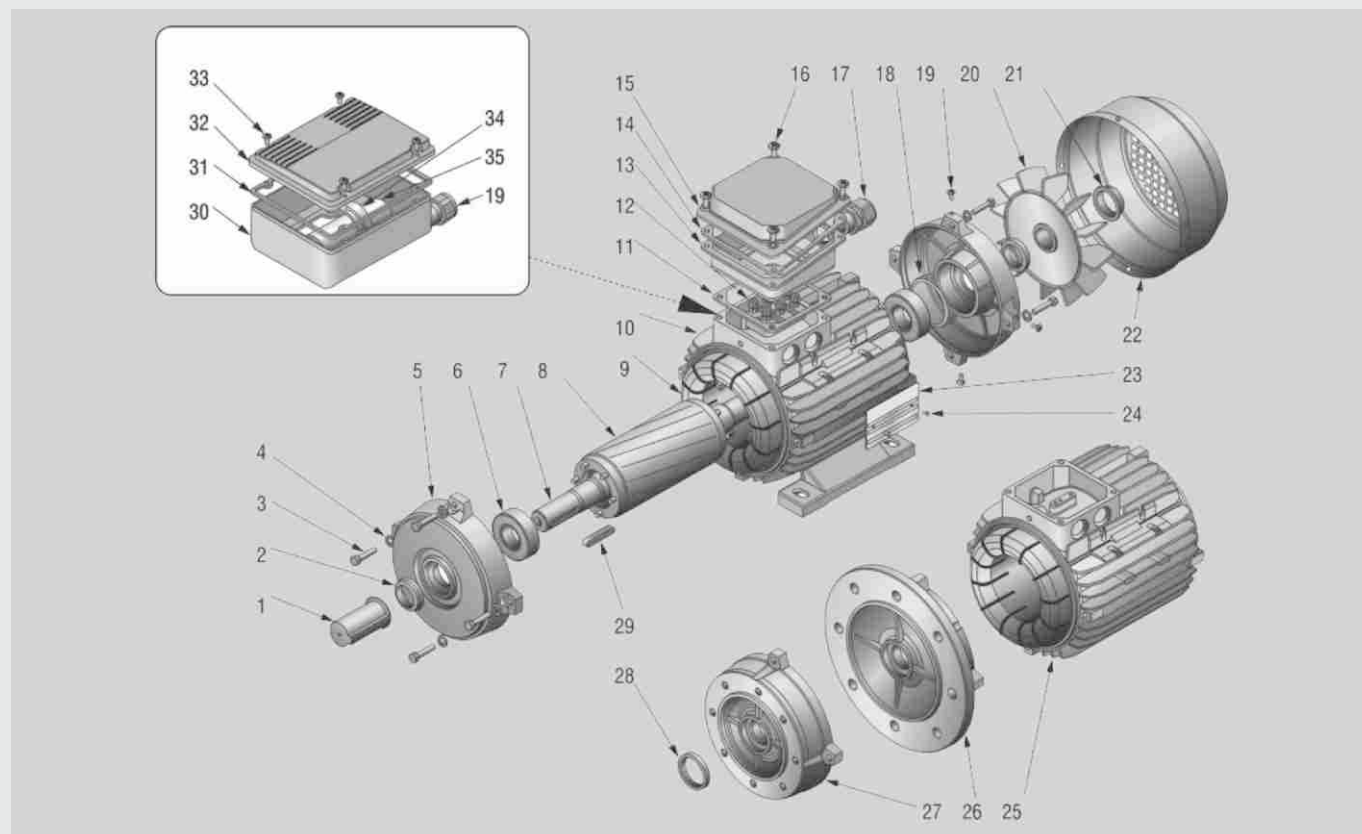EXPLODED VIEW



Part No.	Part Name	Part No.	Part Name	Part No.	Part Name
1	Shaft Cover	13	Terminal Box	25	Motor Frame - B5
2	Dust Shield	14	Gasket - Terminal Box Cover	26	Flange - B5
3	Fixing Bolt - End shield	15	Terminal Box Cover	27	Flange - B14
4	Spring Washer	16	Screws - Terminal Box	28	Dust Shield
5	End shield	17	Cable Gland	29	Shaft Key
6	Bearing	18	Pre-load Washer	30	Terminal Box - 1 Phase
7	Motor Shaft	19	Screw Fan Cover	31	Gasket Terminal Box Cover (1Ph)
8	Rotor	20	Cooling Fan	32	Terminal Box Cover (1Ph)
9	Wound Stator	21	Bush - Cooling Fan	33	Screw - Terminal Box (1Ph)
10	Motor Frame - B3	22	Fan Cover	34	Capacitor Clamp
11	Gasket - Terminal Box	23	Nameplate	35	Capacitor
12	Terminal Block	24	Nameplate Screw		

2 POLE, IE1 - MOTOR (230V SINGLE PHASE)

Model	Power		Speed (rpm)	Rated Current (A)	Efficiency (η%)	Power Factor (CosØ)	Starting Current (A)	Starting Torque Ratio (T _A / T _N)	Tmax Ratio (T _M / T _N)	Weight (kg)
	kW	HP								
I2BE-03M-71*	0.37	0.5	2800	2.73	67	0.92	16	1.8	1.8	8
I2BE-05M-71*	0.55	0.75	2800	3.88	70	0.92	21	1.8	1.8	9
I2BE-07S-80	0.75	1	2800	5.15	72	0.92	29	1.8	1.8	11
I2BE-11S-80	1.1	1.5	2800	7.02	75	0.95	40	1.8	1.8	12
I2BE-15S-90S	1.5	2	2800	9.44	76	0.95	55	1.7	1.8	15
I2BE-22S-90L	2.2	3	2820	13.7	77	0.95	80	1.7	1.8	17

* PSC Type.

2 POLE, IE1 - MOTOR (380V THREE PHASE)

Model	Power		Speed (rpm)	Rated Current (A)	Efficiency (η%)	Power Factor (CosØ)	Starting Current Ratio I _A / I _N	Starting Torque Ratio (T _A / T _N)	Tmax Ratio (T _M / T _N)	Weight (kg)
	kW	HP								
I2BI-03T-71	0.37	0.5	2840	1.0	70	0.81	6.0	2.2	2.2	14
I2BI-05T-71	0.55	0.75	2880	1.4	73	0.82	6.0	2.2	2.2	15
I2BI-07T-80	0.75	1	2890	1.8	75	0.83	6.0	2.2	2.2	16
I2BI-11T-80	1.1	1.5	2900	2.6	77	0.84	7.0	2.2	2.2	17
I2BI-15T-90S	1.5	2	2900	3.4	79	0.84	7.0	2.2	2.2	22
I2BI-22T-90L	2.2	3	2930	4.8	81	0.85	7.0	2.2	2.2	25
I2BI-30T-100L	3	4	2930	6.3	83	0.87	7.0	2.2	2.2	34
I2BI-40T-112M	4	5.5	2930	8.1	85	0.88	8.0	2.2	2.2	45
I2BI-55T-132S	5.5	7.5	2940	11	86	0.88	8.0	2.2	2.2	67
I2BI-75T-132S	7.5	10	2950	15	87	0.88	8.0	2.2	2.2	71
I2BI-110T-160M	11	15	2950	21.3	88	0.88	8.0	2.0	2.2	107
I2BI-150T-160M	15	20	2970	28.7	89	0.89	8.0	2.0	2.2	107
I2BI-185T-160L	18.5	25	2970	34.6	90	0.9	8.0	2.0	2.2	134
I2BI-220T-180M	22	30	2970	40.9	90.5	0.9	8.0	2.0	2.2	169
I2BI-300T-200L	30	40	2970	55.4	91.2	0.9	8.0	2.0	2.2	220
I2BI-370T-200L	37	50	2980	67.7	92	0.9	8.0	2.0	2.2	239
I2BI-450T-225M	45	60	2980	82.3	92.3	0.9	8.0	1.8	2.2	297
I2BI-550T-250M	55	75	2980	101	92.5	0.9	7.0	1.8	2.2	377
I2BI-750T-280S	75	100	2980	134	93	0.9	7.0	1.8	2.2	510
I2BI-900T-280M	90	125	2980	160	93.8	0.91	7.0	1.8	2.2	577
I2BI-A10T-315S	110	150	2980	195	94	0.91	6.8	1.8	2.2	920
I2BI-A32-315M	132	180	2980	233	94.5	0.91	6.8	1.8	2.2	970
I2BI-A60-315L	160	215	2980	279	94.6	0.92	6.8	1.8	2.2	1080
I2BI-B00-315L	200	270	2980	348	94.8	0.92	6.8	1.8	2.2	1130
I2BI-B50-355M	250	335	2980	433	94.8	0.92	7.0	1.6	2.2	1850
I2BI-C15-355L	315	420	2980	544	94.8	0.92	7.0	1.6	2.2	1900

4 POLE, IE1 MOTOR (SINGLE PHASE)

Model	Power		Speed	Rated Current (A)	Efficiency $\eta\%$	Power Factor $\cos\phi$	Starting Current (A)	Starting Torque Ratio (T_A / T_N)	Tmax Ratio (T_M / T_N)	Weight (kg)
	kW	HP								
I4BE-03M-71*	0.37	0.5	1400	2.81	65	0.92	16	1.8	1.8	9
14BE-05M-71*	0.55	0.75	1400	4.0	68	0.92	21	1.8	1.8	11
14BE-07S-80	0.75	1	1400	5.22	71	0.92	30	1.8	1.8	12
14BE-11S-90S	1.1	1.5	1400	7.2	73	0.95	40	1.7	1.8	13
14BE-15S-90L	1.5	2	1400	9.57	75	0.95	55	1.7	1.8	17
14BE-22S-100L	2.2	3	1400	13.9	76	0.95	80	1.7	1.8	26
14BE-30S-100L	3	4	1400	18.6	77	0.95	110	1.7	1.8	28

* PSC Type.

4 Pole, IE1 MOTOR (THREE PHASE)

Model	Power		Speed (rpm)	Rated Current (A)	Efficiency ($\eta\%$)	Power Factor ($\cos\phi$)	Starting Current Ratio I_A / I_N	Starting Torque Ratio (T_A / T_N)	Tmax Ratio (T_M / T_N)	Weight (kg)
	kW	HP								
I4BI-03T-71	0.37	0.5	1400	1.12	67	0.75	5.5	2.2	2.2	16
I4BI-05T-80	0.55	0.75	1400	1.6	71	0.75	5.5	2.2	2.2	17
I4BI-07T-80	0.75	1	1400	2.0	73	0.77	6.0	2.2	2.2	18
I4BI-11T-90S	1.1	1.5	1400	2.9	75	0.77	6.0	2.2	2.2	23
I4BI-15T-90L	1.5	2	1400	3.7	78	0.79	6.0	2.2	2.2	27
I4BI-22T-100L	2.2	3	1420	5.1	80	0.81	7.0	2.2	2.2	35
I4BI-30T-100L	3	4	1420	6.8	82	0.82	7.0	2.2	2.2	38
I4BI-40T-112M	4	5.5	1440	8.8	84	0.82	7.0	2.2	2.2	49
I4BI-55T-132S	5.5	7.5	1440	11.8	85	0.83	7.0	2.2	2.2	67
I4BI-75T-132M	7.5	10	1440	15.5	87	0.84	7.0	2.0	2.0	80
I4BI-110T-160M	11	15	1460	22.3	88	0.85	7.0	2.0	2.2	124
I4BI-150T-160L	15	20	1460	30.1	89	0.85	7.0	2.0	2.2	147
I4BI-185T-180M	18.5	25	1470	36.4	90.5	0.85	7.5	2.2	2.2	169
I4BI-220T-180L	22	30	1470	43.1	91	0.85	7.5	2.2	2.2	184
I4BI-300T-200L	30	40	1470	57.4	92	0.86	7.5	2.2	2.2	241
I4BI-370T-225S	37	50	1480	69.9	92.5	0.87	7.5	2.2	2.2	300
I4BI-450T-225M	45	60	1480	84.7	92.8	0.87	7.5	2.2	2.2	322
I4BI-550T-250M	55	75	1480	103	93	0.89	7.0	2.2	2.2	400
I4BI-750T-280S	75	100	1480	140	93.8	0.86	7.0	2.2	2.2	546
I4BI-900T-280M	90	125	1490	167	94	0.86	7.0	2.2	2.2	620
I4BI-A10T-315S	110	150	1490	201	94.2	0.87	6.9	2.1	2.2	921
I4BI-A32T-315M	132	180	1490	240	94.5	0.87	6.9	2.1	2.2	1002
I4BI-A60T-315L	160	215	1490	287	94.8	0.88	6.9	2.1	2.2	1070
I4BI-B00T-315L	200	270	1490	359	94.9	0.88	6.9	2.3	2.2	1170
I4BI-B50T-355M	250	335	1485	443	94.9	0.88	6.9	2.3	2.2	1580
I4BI-C15T-355L	315	420	1485	556	94.9	0.89	6.9	2.2	2.2	1700

2 POLE, IE2 MOTOR (380-415V THREE PHASE)

Model	Power		Speed (rpm)	Rated Current (A)			Efficiency (η%)	Power Factor (CosØ)	Starting Current Ratio I_A / I_N	Starting Torque Ratio (T_A / T_N)	Tmax Ratio (T_M / T_N)	Rated Torque Nm	Weight (kg)
	kW	HP		380	400	415							
I2BI-07T-80-2	0.75	1	2875	1.77	1.69	1.62	77.4	0.83	5.30	2.5	3	2.49	16
I2BI-11T-80-2	1.1	1.5	2875	2.53	2.4	2.32	79.6	0.83	7.00	3.2	3.8	3.65	17
I2BI-15T-90S-2	1.5	2	2890	3.34	3.17	3.06	81.3	0.84	7.10	2.7	3.5	4.96	22.5
I2BI-22T-90L-2	2.2	3	2890	4.73	4.49	4.32	83.2	0.85	6.90	2.4	3	7.27	25
I2BI-30T-100L-2	3	4	2891	6.19	5.88	5.67	84.6	0.87	8.00	3.2	4	9.91	34.5
I2BI-40T-112M-2	4	5.5	2914	8.05	7.65	7.37	85.8	0.88	7.50	2.5	3	13.11	45
I2BI-55T-132S-2	5.5	7.5	2937	10.9	10.4	10.0	87.0	0.88	7.50	2.7	3.5	17.88	72
I2BI-75T-132S-2	7.5	10	2940	14.5	13.8	13.3	88.1	0.89	7.50	2.4	3.3	24.36	80
I2BI-110T-160M-2	11	15	2930	21.0	20	19.2	89.4	0.89	7.60	2.2	2.9	35.85	108
I2BI-150T-160M-2	15	20	2930	28.4	26.9	26.0	90.3	0.89	7.60	2.3	3	48.89	117
I2BI-185T-160L-2	18.5	25	2937	34.7	33	31.8	90.9	0.89	7.40	2.3	3.1	60.15	135
I2BI-220T-180M-2	22	30	2940	41.1	39.1	37.7	91.3	0.89	7.80	2.8	3.2	71.46	183
I2BI-300T-200L-2	30	40	2950	55.7	52.9	51.0	92.0	0.89	7.80	2.6	3	97.12	227
I2BI-370T-200L-2	37	50	2950	68.3	64.9	62.5	92.5	0.89	7.70	2.6	3	119.78	247
I2BI-450T-225M-2	45	60	2960	82.7	78.6	75.7	92.9	0.89	7.50	2.4	2.6	145.19	297
I2BI-550T-250M-2	55	75	2965	100.7	95.7	92.2	93.2	0.89	7.10	2.3	2.8	177.15	390
I2BI-750T-280S-2	75	100	2970	136.5	129.7	125	93.8	0.89	7.40	2.5	2.8	241.16	519
I2BI-900T-280M-2	90	125	2970	163.3	155.1	149.5	94.1	0.89	7.60	2.8	2.8	289.39	588
I2BI-A10T-315S-2	110	150	2975	196.9	187.1	180.3	94.3	0.90	6.9	2.4	2.8	353.11	948
I2BI-A32T-315M-2	132	180	2975	235.6	223.8	215.7	94.6	0.90	7.1	2.6	2.9	423.73	1009
I2BI-A60T-315L-2	160	215	2975	281.8	267.7	258	94.8	0.91	7.1	2.5	2.9	513.61	1111
I2BI-B00T-315L-2	200	270	2975	351.5	333.9	321.9	95	0.91	6.9	2.5	2.8	642.02	1140
I2BI-B50T-355M-2	250	335	2980	439.4	417.4	402.3	95	0.91	7.0	2.5	2.8	801.17	1938
I2BI-C15T-355L-2	315	420	2980	553.6	525.9	506.9	95	0.91	7.0	2.5	2.9	1009.48	2342

4 POLE, IE2 MOTOR (380-415V THREE PHASE)


Model	Power		Speed (rpm)	Rated Current (A)			Efficiency (η%)	Power Factor (CosØ)	Starting Current Ratio I_A / I_N	Starting Torque Ratio (T_A / T_N)	Tmax Ratio (T_M / T_N)	Rated Torque Nm	Weight (kg)
	kW	HP		380	400	415							
I4BI-07T-80-2	0.75	1	1400	1.91	1.81	1.75	79.6	0.75	5	2.4	2.9	5.12	18
I4BI-11T-90S-2	1.1	1.5	1440	2.74	2.6	2.51	81.4	0.75	6	3	3.5	7.3	22
I4BI-15T-90L-2	1.5	2	1445	3.67	3.49	3.36	82.8	0.75	6.8	3.2	3.8	9.91	27
I4BI-22T-100L-2	2.2	3	1440	4.9	4.65	4.48	84.3	0.81	7	3	3.5	14.6	35
I4BI-30T-100L-2	3	4	1140	6.5	6.18	5.95	85.5	0.82	7	2.6	3.3	19.9	41.5
I4BI-40T-112M-2	4	5.5	1445	8.56	8.13	7.84	86.6	0.82	7.5	3.5	4	26.4	49
I4BI-55T-132S-2	5.5	7.5	1455	11.6	11	10.6	87.7	0.82	6.4	2.2	2.8	36.1	77
I4BI-75T-132M-2	7.5	10	1455	15.5	14.7	14.2	88.7	0.83	7	2.4	3	49.2	87
I4BI-110T-160M-2	11	15	1460	21.9	20.8	20	89.8	0.85	6.9	2.5	2.9	71.9	110
I4BI-150T-160L-2	15	20	1460	29.2	27.8	26.8	90.6	0.86	7.5	2.5	3	98.1	132
I4BI-185T-180M-2	18.5	25	1470	35.8	34	32.8	91.2	0.86	7.8	2.6	3.1	120.2	172
I4BI-220T-180L-2	22	30	1470	42.4	40.3	38.9	91.6	0.86	7.5	2.6	3.1	142.9	180
I4BI-300T-200L-2	30	40	1470	57.4	54.6	52.6	92.3	0.86	7.1	2.4	2.9	194.9	247
I4BI-370T-225S-2	37	50	1480	70.5	67	64.6	92.7	0.86	7.5	2.5	2.7	238.8	297
I4BI-450T-225M-2	45	60	1480	85.4	81.1	78.2	93.1	0.86	7.6	2.5	2.8	290.4	322
I4BI-550T-250M-2	55	75	1480	103.9	98.7	95.2	93.5	0.86	7.3	2.6	2.7	354.9	413
I4BI-750T-280S-2	75	100	1480	137.8	130.9	126.1	94.0	0.88	7.6	2.7	2.7	484	558
I4BI-900T-280M-2	90	125	1480	155	156.7	151	94.2	0.88	7.5	2.7	2.7	580.7	632
I4BI-A10T-315S-2	110	150	1485	201	190.9	184	94.5	0.88	7.1	2.7	2.9	707.4	950
I4BI-A32T-315M-2	132	180	1485	240.7	228.6	220.4	94.7	0.88	7.3	2.7	2.9	889	1035
I4BI-A60T-315L-2	160	215	1485	287.8	273.4	263.5	94.9	0.89	7.4	3	3.0	1029	1105
I4BI-B00T-315L-2	200	270	1485	359	341.1	328.7	95.1	0.89	7.6	3	3.0	1286	1225
I4BI-B50T-355M-2	250	335	1490	443.8	421.6	406.4	95.1	0.90	7.5	2.8	2.9	1602	1740
I4BI-C15T-355L-2	315	420	1490	559	531.2	512	95.1	0.90	7.4	2.6	2.8	2019	1900

2 POLE, IE3 MOTOR (380-415V THREE PHASE)

Model	Power		Speed (rpm)	Rated Current (A)			Efficiency (η%)	Power Factor (CosØ)	Starting Current Ratio I_A / I_N	Starting Torque Ratio (T_A / T_N)	Tmax Ratio (T_M / T_N)	Rated Torque Nm	Weight (kg)
	kW	HP		380	400	415							
I2BI-07T-80-3	0.75	1	2880	1.7	1.61	1.56	80.7	0.83	5.5	1.8	3.5	2.49	20
I2BI-11T-80-3	1.1	1.5	2880	2.43	2.31	2.22	82.7	0.83	7.5	2.6	3.5	3.65	21
I2BI-15T-90S-3	1.5	2	2895	3.25	3.09	2.98	84.2	0.83	7.1	2.6	3.5	4.95	26
I2BI-22T-90L-3	2.2	3	2895	4.57	4.34	4.19	85.9	0.85	7	2	3	7.26	29
I2BI-30T-100L-3	3	4	2895	5.94	5.64	5.44	87.1	0.88	8.6	2	3.2	9.9	43
I2BI-40T-112M-3	4	5.5	2905	7.83	7.44	7.17	88.1	0.88	8	1.8	2.9	13.1	51
I2BI-55T-132S-3	5.5	7.5	2930	10.6	10.1	9.75	89.2	0.88	7.5	2.1	2.5	17.9	76
I2BI-75T-132S-3	7.5	10	2930	14.4	13.7	13.2	90.1	0.88	7.3	2	3.5	24.4	84
I2BI-110T-160M-3	11	15	2945	20.4	19.3	18.6	91.2	0.90	7.3	2.3	2.6	35.7	128
I2BI-150T-160M-3	15	20	2945	27.2	25.9	24.9	91.9	0.91	7	1.9	2.3	48.6	140
I2BI-185T-160L-3	18.5	25	2940	34.1	32.4	31.3	92.4	0.89	7	1.6	2.5	60.1	155
I2BI-220T-180M-3	22	30	2955	40.1	38.1	36.7	92.7	0.90	7	1.6	2.5	71.1	192
I2BI-300T-200L-3	30	40	2960	54.8	52.1	50.2	93.3	0.89	7	1.5	2.5	96.8	246
I2BI-370T-200L-3	37	50	2960	65.9	62.6	60.3	93.7	0.91	7.3	1.5	2.5	119	267
I2BI-450T-225M-3	45	60	2965	82.5	78.4	75.5	94.0	0.88	6.8	1.6	2.5	145	353
I2BI-550T-250M-3	55	75	2970	99.6	94.6	91.2	94.3	0.89	7.2	1.6	2.6	176.9	408
I2BI-750T-280S-3	75	100	2975	134	127	122	94.7	0.91	7.2	1.2	2	240.8	548
I2BI-900T-280M-3	90	125	2975	162	153	148	95.0	0.89	7.4	1.2	2	288.9	596
I2BI-A10T-315S-3	110	150	2978	195	185	179	95.2	0.90	7.3	1.2	2	352.8	956
I2BI-A32T-315M-3	132	175	2978	233	222	214	95.4	0.90	7.3	1.3	2.1	432.3	1017
I2BI-A60T-315L-3	160	215	2980	283	268	259	95.6	0.90	6.8	1.2	2	512.8	1119
I2BI-B00T-315L-3	200	270	2980	349	331	319	95.8	0.91	7.8	1.1	2	640.9	1150
I2BI-B50T-355M-3	250	335	2982	431	409	394	95.8	0.92	7.9	1.1	2	800.6	1948
I2BI-C15T-355L-3	315	425	2982	543	519	497	95.8	0.92	7.9	1.1	2	1009	2356


4 POLE, IE3 MOTOR (380-415V THREE PHASE)

Model	Power		Speed (rpm)	Rated Current (A)			Efficiency (η%)	Power Factor (CosØ)	Starting Current Ratio I_A / I_N	Starting Torque Ratio (T_A / T_N)	Tmax Ratio (T_M / T_N)	Rated Torque Nm	Weight (kg)
	kW	HP		380	400	415							
I4BI-07T-80-3	0.75	1	1420	1.86	1.77	1.7	82.5	0.74	6	2.9	3.6	5.04	22
I4BI-11T-90S-3	1.1	1.5	1445	2.68	2.55	2.46	84.1	0.74	6.5	2.7	3.8	7.27	27
I4BI-15T-90L-3	1.5	2	1445	3.61	3.43	3.3	85.3	0.74	6.8	3	3.6	9.91	32
I4BI-22T-100L-3	2.2	3	1435	4.93	4.68	4.52	86.7	0.78	7.2	2.5	3.5	14.6	44
I4BI-30T-100L-3	3	4	1435	6.66	6.32	6.09	87.7	0.78	7.2	2.6	3.5	20	49
I4BI-40T-112M-3	4	5.5	1440	8.56	8.14	7.84	88.6	0.80	7	2.3	3.2	26.5	56
I4BI-55T-132S-3	5.5	7.5	1460	11.6	11.1	10.7	89.6	0.80	7.1	2.7	3.5	36	81
I4BI-75T-132M-3	7.5	10	1460	15.3	14.6	14	90.4	0.82	7.2	2.7	3.8	49.1	91
I4BI-110T-160M-3	11	15	1465	22.3	21.2	20.4	91.4	0.82	6.8	1.9	2.3	71.7	141
I4BI-150T-160L-3	15	20	1465	30.1	28.6	27.6	92.1	0.82	6.8	1.8	2.4	97.8	151
I4BI-185T-180M-3	18.5	25	1470	36.1	34.3	33.1	92.6	0.84	6.9	1.8	2.5	120.2	190
I4BI-220T-180L-3	22	30	1470	42.3	40.2	38.7	93.0	0.85	7	1.8	2.5	142.9	205
I4BI-300T-200L-3	30	40	1475	56.5	53.7	51.7	93.6	0.86	6.8	1.8	2.3	194.2	275
I4BI-370T-225S-3	37	50	1485	69.5	66.1	63.7	93.9	0.86	7.1	1.7	2.3	237.9	315
I4BI-450T-225M-3	45	60	1485	83.2	79.1	76.2	94.2	0.87	7.1	1.8	2.4	289.4	345
I4BI-550T-250M-3	55	75	1485	101	96.2	92.7	94.6	0.87	7	1.8	2.4	353.7	421
I4BI-750T-280S-3	75	100	1486	138	131	126	95.0	0.87	6.9	1.8	2.2	482	538
I4BI-900T-280M-3	90	125	1486	165	157	151	95.2	0.87	7.2	1.6	2.1	578.4	638
I4BI-A10T-315S-3	110	150	1488	199	189	182	95.4	0.88	7.2	1.6	2.1	706	958
I4BI-A32T-315M-3	132	175	1488	238	226	218	95.6	0.88	7.2	1.5	2.0	847	1045
I4BI-A60T-315L-3	160	215	1488	288	274	264	95.8	0.88	6.8	1.5	2.0	1027	1115
I4BI-B00T-315L-3	200	270	1490	360	342	329	96	0.88	7.2	1.6	2.1	1282	1233
I4BI-B50T-355M-3	250	335	1490	449	427	411	96	0.88	7.3	1.4	2.1	1603	1744
I4BI-C15T-355L-3	315	425	1490	567	538	519	96	0.88	7.4	1.4	2.0	2019	1950

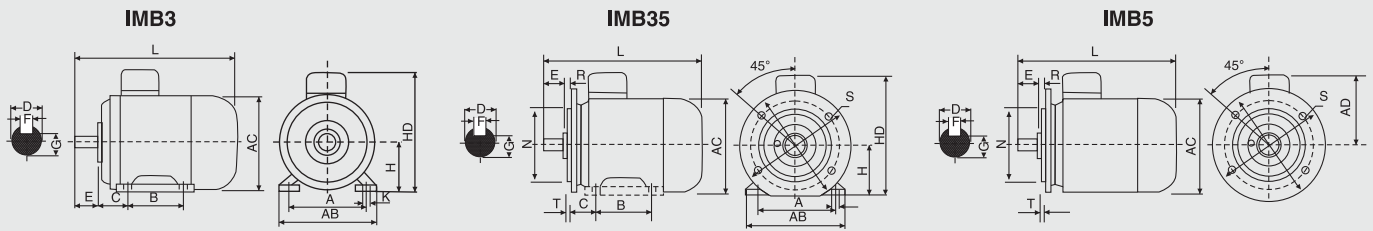


Frame Size	Mounting Dimensions (mm)																		Frame Dimensions (mm)						
	A	B	C	D		E		F		G		H	K	M	N	P	R	S	T	AB	AC	AD	HD	L	
				2 Pole	4 Pole	2 Pole	4 Pole	2 Pole	4 Pole	2 Pole	4 Pole													2 Pole	4 Pole
71	112	90	45	14	14	30	30	5	5	11	11	71	7	130	110	160	0	10	3	150	145	80	195	255	255
80	125	100	50	19	19	40	40	6	6	15.5	15.5	80	10	165	130	200	0	12	3.5	165	175	145	220	295	295
90S	140	100	56	24	24	50	50	8	8	20	20	90	10	165	130	200	0	12	3.5	180	195	155	250	320	320
90L	140	125	56	24	24	50	50	8	8	20	20	90	10	165	130	200	0	12	3.5	180	195	155	250	345	345
100L	160	140	63	28	28	60	60	8	8	24	24	100	12	215	180	250	0	15	4	205	215	180	270	385	385
112M	190	140	70	28	28	60	60	8	8	24	24	112	12	215	180	250	0	15	4	230	240	190	300	400	400
132S	216	140	89	38	38	80	80	10	10	33	33	132	12	265	230	300	0	15	4	270	275	210	345	470	470
132M	216	178	89	38	38	80	80	10	10	33	33	132	12	265	230	300	0	15	4	270	275	210	345	510	510
160M	254	210	108	42	42	110	110	12	12	37	37	160	15	300	250	350	0	19	5	315	330	255	400	605	605
160L	254	254	108	42	42	110	110	12	12	37	37	160	15	300	250	350	0	19	5	315	330	255	400	660	660
180M	279	241	121	48	48	110	110	14	14	42.5	42.5	180	15	300	250	350	0	19	5	355	380	280	440	690	690
180L	279	279	121	48	48	110	110	14	14	42.5	42.5	180	15	300	250	350	0	19	5	355	380	280	440	725	725
200L	318	305	133	55	55	110	110	16	16	49	49	200	19	350	300	400	0	19	5	410	420	305	500	765	765
225S	356	286	149	-	60	-	140	-	18	-	53	225	19	400	350	450	0	19	5	445	470	335	555	-	810
225M	356	311	149	55	60	110	140	16	18	49	53	225	19	400	350	450	0	19	5	445	470	335	550	805	835
250M	406	349	168	60	65	140	140	18	18	53	58	250	24	500	450	550	0	19	5	485	510	370	615	910	910
280S	457	368	190	65	75	140	140	18	20	58	67.5	280	24	500	450	550	0	19	5	550	580	410	660	980	980
280M	457	419	190	65	75	140	140	18	20	58	67.5	280	24	500	450	550	0	19	5	550	580	410	660	1030	1030
315S	508	406	216	65	80	140	170	18	22	58	71	315	28	600	550	660	0	24	6	630	645	630	825	1180	1275
315M	508	457	216	65	80	140	170	18	22	58	71	315	28	600	550	660	0	24	6	630	645	630	830	1290	1320
315L	508	508	216	65	80	140	170	18	22	58	71	315	28	600	550	660	0	24	6	630	645	630	830	1290	1320
355M	610	560	254	75	95	140	170	20	25	67.5	86	355	28	740	680	800	0	24	6	705	710	655	1010	1510	1540
355L	610	630	254	75	95	140	170	20	25	67.5	86	355	28	740	680	800	0	24	6	705	710	655	1010	1510	1540

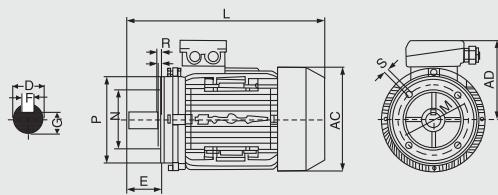IMB14



Frame Size	Mounting Dimensions (mm)										Frame Dimensions (mm)		
	E	F	D	G	M	N	P	R	S		AC	AD	L
71	30	5	14	11	85	70	105	0	M6		150	110	246
80	40	6	19	15.5	100	80	120	0	M6		170	135	285
90S	50	8	24	20	115	95	140	0	M8		185	137	335
90L	50	8	24	20	115	95	140	0	M8		185	137	335
100L	60	8	28	24	130	110	160	0	M8		206	150	376
112M	80	8	28	24	130	110	160	0	M8		228	170	400
132S	80	10	38	33	165	130	200	0	M10		267	190	460
132M	110	10	38	33	165	130	200	0	M10		267	190	500
160M	110	12	42	37	215	180	250	0	M12		330	255	615
160L	110	12	42	37	215	180	250	0	M12		330	255	675
180M	110	14	48	42.5	265	230	300	0	M15		380	280	700
180L	110	14	48	42.5	265	230	300	0	M15		380	280	740

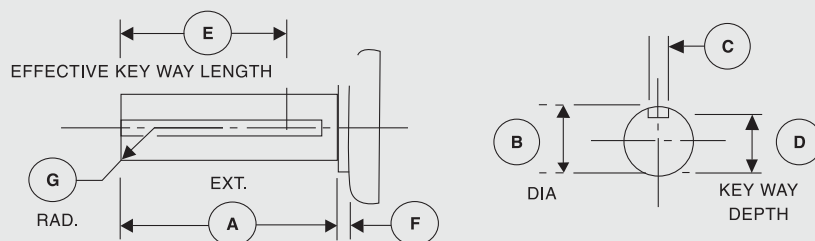SHAFT & KEY DIMENSIONS



Frame	A		B		C		D		E		F		G	
	2 Pole	4 Pole	2 Pole	4 Pole	2 Pole	4 Pole	2 Pole	4 Pole	2 Pole	4 Pole	2 Pole	4 Pole	2 Pole	4 Pole
D.71	30	-	14	-	5 x 5	-	-	-	11	-	14	-	-	-
D.80	40	-	19	-	6 x 6	-	-	-	15.5	-	25	-	-	-
D.90	50	-	24	-	8 x 7	-	-	-	20	-	32	-	-	-
D.100	60	-	28	-	8 x 7	-	-	-	23.9	-	40	-	-	-
D.112	60	-	28	-	8 x 7	-	-	-	23.9	-	40	-	-	-
D.132	80	-	38	-	10 x 8	-	-	-	33	-	56	-	-	-
D.160	110	-	42	-	12 x 8	-	-	-	37	-	80	-	-	-
D.180	110	-	48	-	14 x 9	-	-	-	42.5	-	80	-	-	-
D.200	110	-	55	-	16 x 10	-	-	-	48.8	-	80	-	-	-
D.225	110	140	55	60	16 x 10	18 x 11	-	-	48.8	53	80	110	-	-
D.250	140	140	60	70	18 x 11	20 x 12	-	-	53	62.5	110	110	-	-
D.280	140	170	65	80	18 x 11	20 x 12	-	-	58	71	110	140	-	-
D.315S-M	140	170	65	85	18 x 11	22 x 14	-	-	58	76	110	140	-	-
D.315L		170		90		25 x 14	-	-		81		140	-	-















DEGREE OF PROTECTION

Degrees of protection for mechanical machines are designated in accordance with IS 4691 / IEC 60034-5 by the letters IP and two characteristic numerals.

First numeral : Protection against contact and ingress of foreign bodies ↓	No. special protection	Protection against falling water drops	Protection against dropping water when inclined by up to 15 degrees	Protection against water spray when inclined by up to 60 degrees from vertical	Protection against water splashed from any direction	Protection against water projected by nozzle from any direction	Protection against Powerful jet	
Second Numeral : Protection against ingress of water →	0	1	2	3	4	5	6	
0 No special protection								
1 Protection against solid foreign objects > 50 mm (Example: inadvertent contact with hand)								
2 Protection against solid foreign objects > 12 mm (Example: inadvertent contact with the fingers)		IP 21	IP 22	IP 23				
3 Protection against solid foreign objects > 2.5 mm (Example: Inadvertent contact with wire & tools)								
4 Protection against solid foreign objects > 1 mm (Example: Inadvertent contact with wire, bands)					IP 44			
5 Protection against dust (Harmful deposits of dust)					IP 54	IP 55	IP 56	

MOUNTING ARRANGEMENTS

Mounting arrangements for rotating electrical machines are designated according to IS 2253 / IEC 60034-7. Our motors are available with the mounting arrangements listed below, depending on design and frame size.

Foot mounting	Flange mounting
 B3 - Horizontal foot mounted	 B5 - Flange type 'D'
 B6 - Horizontal wall mounted (LHS)	 V1 - Vertical down wards flange type 'D'
 B7 - Horizontal wall mounted (RHS)	 V3 - Vertical up wards flange type 'D'
 B8 - Horizontal ceiling mounted	 B35 - Horizontal base flange type 'D'
 V5 - Wall mounted shaft down wards	 B14 - Horizontal face flange type 'C'
 V6 - Wall mounted shaft up wards	 V18 - Vertical face down wards flange type 'C'
 B34 - Horizontal base flange type 'C'	 V19 - Vertical face up wards flange type 'C'

It is essential to state the desired mounting arrangement when ordering, as the constructive design depends partly on the mounting arrangement.

ELECTRICAL PARAMETERS

RATED VOLTAGE

Motors are suitable for variation of $\pm 10\%$ of the rated voltage. Therefore the motors are designed for the following rated voltage ranges

Rated voltage

230 V $\pm 10\%$

415 V $\pm 10\%$

690 V $\pm 10\%$

RATED CURRENT OR FULL LOAD CURRENT

As the torque load on a motor increases, the amperage required to power the motor also increases. When the full-load torque and horsepower is reached, the corresponding amperage is known as the full-load amperage (FLA).

STARTING CURRENT

It is usually given as a percentage or as a multiple of rated current. The starting current is the value of the current drawn by the motor during starting. The value of the starting current is generally between 5 to 7 times of the rated current.

RATED POWER

Rated power is the measure of how much work a motor can be expected to do. This value is based on the motor's full-load torque and full-load speed ratings and is calculated as follows:

Horsepower (hp) = $[\text{Motor Speed} \times \text{Torque (lb-ft)}] \div 5,250$

INPUT POWER (kW)

The Amount of power the motor consumes to produce the output power.

OUTPUT POWER (kW)

The Amount of power motor can produce at shaft and not reduce life of motor.

RATED FREQUENCY

Motors are suitable for 50Hz with a variation of $\pm 5\%$

NUMBER OF POLES

Number of poles of the motor determine the basic speed of the motor. Standard motors are available in the configuration of 2, 4, 6 and 8 poles

RATED SPEED

Speed of the motor runs at when fully loaded and supplied rated nameplate voltage.

$$\text{Speed (n)} = \frac{120f}{P}$$

n = Speed in rpm

f = Frequency in hertz

P = No. of Poles

SLIP

The rotor in an induction motor lags slightly behind the synchronous speed of the changing polarity of the magnetic field. Due to this, the actual speed of an induction motor is always somewhat less than its synchronous speed. The difference between the synchronous and actual speed is called slip.

Induction motors are made with slip ranging from less than 5% up to 20%. A motor with a slip of 5% or less is known as a normal-slip motor.

Slip is expressed as

$$S = \left(\frac{n_s - n_a}{P} \right) \times 100\%$$

where

S = slip in %

n_s = synchronous speed (rpm)

n_a = Actual speed (rpm)

SERVICE FACTOR

Service factor (SF) is an indication of how much overload a motor can withstand when operating normally within the correct voltage tolerances.

POWER FACTOR

Power factor is the ratio of motor load watts divided by volt-amps at the full-load condition. Power factor for a motor changes with its load. Power factor is minimum at no load and increases as additional load is applied to the motor. Power factor usually reaches a peak at or near full load on the motor.

TORQUE

Torque is the turning effort. Torque is the turning force through a radius with the units – Nm in the SI-system and lbft in the imperial system. The torque developed by an induction motor varies when the motor accelerates from full stop or zero speed to maximum operating speed.

STARTING TORQUE

Starting Torque is the torque the electrical motor develop when its starts at rest or zero speed.

FULL-LOAD (RATED) TORQUE OR BRAKING TORQUE

The Full-load Torque is the torque required to produce the rated power of the electrical motor at full-load speed.

In imperial units the Full-load Torque can be expressed as

$$T = 5252 P_{hp} / n_r$$

where

T = full-load torque (lbft)

P_{hp} = rated horsepower

n_r = rated rotational speed (rpm)

In metric units the rated torque can be expressed as

$$T = 9550 P_{kW} / n_r$$

where

T = rated torque (Nm)

P_{kW} = rated power (kW)

n_r = rated rotational speed (rpm)

FULL-LOAD EFFICIENCY

The efficiency is given as a percentage and indicates how well the motor converts electrical power into mechanical power. The closer this value is to 100%, the lower the electricity consumption cost is going to be. Generally, larger motors will be more efficient than smaller motors.

The efficiency value that appears on the nameplate is the nominal full-load efficiency

INSULATION CLASS AND RATED AMBIENT TEMPERATURE

A critical element in motor life is the maximum temperature that occurs at the hottest spot in the motor. The temperature that occurs at that spot is a combination of motor design (temperature rise) and the ambient (surrounding) temperature.

MOMENT OF INERTIA

The moment of inertia of an induction motor is used to calculate the required starting torque of the motor and to ensure that it is capable of accelerating the rotating mass up to synchronous speed without stalling. Moment of inertia is time taken by an induction motor to reach at rated speed & rated torque at rated voltage without stalling.

CONNECTION TYPES

Windings of standard three phase motors can be connected either in star or delta connection

STAR CONNECTION

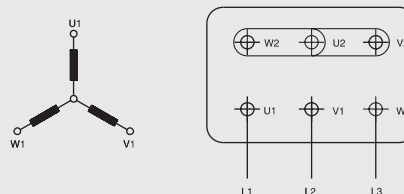
In STAR connection, the starting or finishing ends (Similar ends) of three coils are connected together to form the neutral point. A common wire is taken out from the neutral point which is called Neutral.

Line Current is Equal to Phase Current. i.e. Line Current = Phase Current

$$I_L = I_{PH}$$

Line Voltage is $\sqrt{3}$ times of Phase Voltage. i.e.

$$V_L = \sqrt{3} V_{PH}$$

**DELTA CONNECTION**

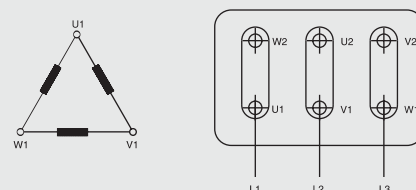
In DELTA connection, the opposite ends of three coils are connected together. In other words, the end of each coil is connected with the start of another coil, and three wires are taken out from the coil joints

Line Voltage is Equal to Phase Voltage. i.e. Line Voltage = Phase Voltage

$$V_L = V_{PH}$$

Line Current is $\sqrt{3}$ times of Phase Current. i.e.

$$I_L = \sqrt{3} I_{PH}$$



STARTING METHODS FOR AC MOTORS

Reducing Electrical and Mechanical Stress at Start-up

The starting current of an AC motor can vary from 3 to 7 times the full load current. This is because a large amount of energy is required to magnetise the motor enough to overcome the inertia the system has at standstill. The high current drawn from the network can cause problems such as voltage drop, high transients and in some cases, uncontrolled shutdown. High starting current also causes great mechanical stress on the motor's rotor bars and windings and can affect the driven equipment and the foundations. Several starting methods exist, all aiming to reduce these stresses. The load, the motor and the supply network determine the most appropriate starting method.

Direct-on-line (DOL) Starter

Direct on line starting is suitable for stable supplies and mechanically stiff and well dimensioned systems. It is the simplest, cheapest and most common starting method. Starting equipment for small motors that do not start and stop frequently is simple, often consisting of a hand operated motor protection circuit breaker. Larger motors and motors that start and stop frequently, or have some kind of control system, normally use a direct-on-line starter which can consist of a contactor plus overload protection, such as a thermal relay.

Star-Delta (Y/Δ) Starter

This kind of starters used to first start the motor with the winding connected in star and then switch for delta connection in running position. To limit the starting current surge, large induction motors are started at reduced voltage and then have full supply voltage reconnected when they run up to near rotated speed. Star Delta connection gives a low starting current of only about one third of that during direct-online starting, although this also reduces the starting torque to about 25%. The motor is started with λ connection and accelerated as far as possible, then switched to Δ connection.

Soft Starter

Soft starters are based on semiconductors, which, via a power circuit and a control circuit, initially reduce the motor voltage, resulting in lower motor torque. During the starting process, the soft starter progressively increases the motor voltage so that the motor becomes strong enough to accelerate the load to rated speed without causing torque or current peaks. Soft starters can also be used to control the stopping of a process. Soft starters are less costly than frequency converters but like frequency converters, they may inject harmonic currents into the grid, disrupting other processes.

Frequency Converter Starter

The frequency converter is designed for continuous feeding of motors can also be used exclusively for start-up only. The frequency converter enables low starting current because the motor can produce rated torque at rated current from zero to full speed. As the price of frequency converters continues to drop, they are increasingly replacing soft starters. However in most cases they are still more expensive than soft starters, and like these, they inject harmonic currents into the network.

INSULATION SYSTEM TEMPERATURE CLASS

Electrical insulation systems are rated by standard NEMA (National Electrical Manufacturers Association) classifications according to maximum allowable operating temperature:

Temperature Tolerance Class	Maximum Operation Temperature Allowed		Allowable Temperature Rise at full load 1.0 service factor motor	Allowable Temperature Rise 1.15 service factor motor
	°C	°F	°C	°C
A	105	221	60	70
B	130	266	80	90
F	155	311	105	115
H	180	356	125	-

$$* T(^{\circ}\text{F}) = [T(^{\circ}\text{C})](9/5) + 32$$

1) Allowable temperature rises are based upon a reference ambient temperature of 40°C. Operation temperature is reference temperature + allowable temperature rise + allowance for "hot spot" winding.

Example Temperature Tolerance Class F:

$$40^{\circ}\text{C} + 105^{\circ}\text{C} + 10^{\circ}\text{C} = 155^{\circ}\text{C}$$

In general a motor should not operate with temperatures above the maximum. Each 10°C rise above the rating may reduce the motor life time by one half. It is important to be aware that insulation classes are directly related to motor life.

[illegible]

WINNING WAYS

When you have a good thing going it is quite in the fitting of things that recognitions come our way. Several prestigious awards, which decorate our shelf, say it all. These rewards not only acknowledge our position as a leader in the water pump industry but also serve as reminders about what the customer expects from a winner. And we, as ever, have our ears perfectly tuned to customer expectations.





C.R.I. PUMPS (PVT) LIMITED

(International Division)

7/46-1, Keeranatham Road, Saravanampatty, Coimbatore - 641 035. **India.**

Phone : +91-422-3911610, 3911612. Fax : +91-422-3911600 e-mail : cri@criexports.com website: www.crigroups.com

C.R.I. PUMPS (FZE)

P.O. Box 7988, A4-12 SAIF-Zone, **Sharjah, U.A.E.**

Tel : +971-6-5573041 (3 Lines), Fax : +971-6-5573042

e-mail : criumps@eim.ae website : www.cripumps.com

C.R.I. PUMPS S.A. (PTY) LIMITED

P.O. Box 6292, Halfway House, Midrand - 1685,

Johannesburg, **South Africa.**

Tel : +27-11-8058631 / 32 Fax : +27-11-8058630

e-mail : cri@criumps.co.za website : www.cripumps.co.za

Branch : Capetown : + 27-21-9499122

C.R.I. POMPA SANAYİ VE TİCARET LİMİTED ŞİRKETİ

10032 Sk. No:12 A.O.S.B. 35620 Çiğli-İzmir-**Türkiye.**

Tel : +90-232-328 22 99 Fax : +90-232-328 23 33

e-mail : cri@cripompa.com Website: www.cripompa.com

BOMBAS C.R.I. ESPAÑA S.L.

UNIPERSONAL

Via Linara, 8, 82030, Limatola (BN). **Italy.** Tel : +39.0823.586.904

e-mail : cri@bombascri.it Website: www.crigroups.com

C.R.I. FLUID SYSTEMS USA LLC

2000, Exchange Drive, Arlington, TX 76011. **USA**

Website : www.crigroups-usa.com

C.R.I. FLUID SYSTEM (BD) LTD.,

212, Tejgaon Industrial Area, Tejgaon-Gulshan Link Rd,

Dhaka-1208, **Bangladesh**

Website : www.cripumps.com.bd

C.R.I. PUMPS (Shanghai) Co., Ltd.

Building 53 (No. 17), 588 Yindu Road,

Minhang District, Shanghai, **China.**

Tel : +86-21-54405082, Fax : +86-21-54405083

e-mail : cri@bombascri.com.cn website : www.bombascri.com.cn

SUZHOU C.R.I. PUMPS CO., LTD.

579, Longqia Road, Wujiang District- 215200

Suzhou, **China.** Telephone:- +86-512-634 33668

Fax:- +86-512-634 33667. e-mail:-cri@crisuzhou.com.cn

C.R.I. BOMBAS HIDRÁULICAS LTDA

Av. Rodrigo Fernando Grillo, 457, Jd. Manacas,

CEP - 14.801-534, Araraquara - SP, **Brasil.**

Fone : +55-16-3331 1099, Fax +55-16-3331 5344

e-mail : cri@cribombas.com.br website : www.cribombas.com.br

Filial : Jaboatão dos Guararapes-PE, Brasil.

Fone : (81) 3093-9620, Fax : (81) 3093-9600.

BOMBAS C.R.I. ESPAÑA, S.L.

Poligono Industrail El.Bony Calle 31, No.137, 46470

Catarroja (Valencia) **Spain.**

Tel : +34-96 1842 974 Fax: +34-96 1842 977.

e-mail : cri@bombascri.es Website: www.bombascri.es

C.R.I. FLUID SYSTEMS INC.,

Polyland Industrial Subdivision, Warehouse 3 Block 4,

Kendex St., Bo. Iba, Meycauyan, Bulacan. **Philippines**

Website : www.cripumps.ph

P.T. C.R.I. FLUID SYSTEMS

Indonesia



<https://www.youtube.com/user/cripumpsglobal>



<https://www.facebook.com/criglobal>

